

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 November 2004 (11.11.2004)

PCT

(10) International Publication Number  
**WO 2004/097386 A1**

(51) International Patent Classification<sup>7</sup>: **G01N 23/04**,  
H05G 1/60, A61B 6/03

Surrey GU1 2SL (GB). LUGGAR, Russell, David  
[GB/GB]; 17 Dene Street Gardens, Dorking, Surrey RH4  
2DN (GB). DE ANTONIS, Paul [GB/GB]; 3 Vale Drive,  
Horsham, West Sussex RH12 2JU (GB).

(21) International Application Number:  
PCT/GB2004/001729

(22) International Filing Date: 23 April 2004 (23.04.2004)

(74) Agent: BARKER BRETTELL; 138 Hagley Road, Edg-  
baston, Birmingham B16 9PW (GB).

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(26) Publication Language: English

(30) Priority Data:  
0309387.9 25 April 2003 (25.04.2003) GB

(71) Applicant (for all designated States except US): CRX  
LIMITED [GB/GB]; Unit 5, Riverside Business Centre,  
Walnut Tree Close, Guildford GU1 4UG (GB).


(72) Inventors; and

(75) Inventors/Applicants (for US only): MORTON, Ed-  
ward, James [GB/GB]; 37 Banders Rise, Guildford,

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: CONTROL MEANS FOR HEAT LOAD IN X-RAY SCANNING APPARATUS

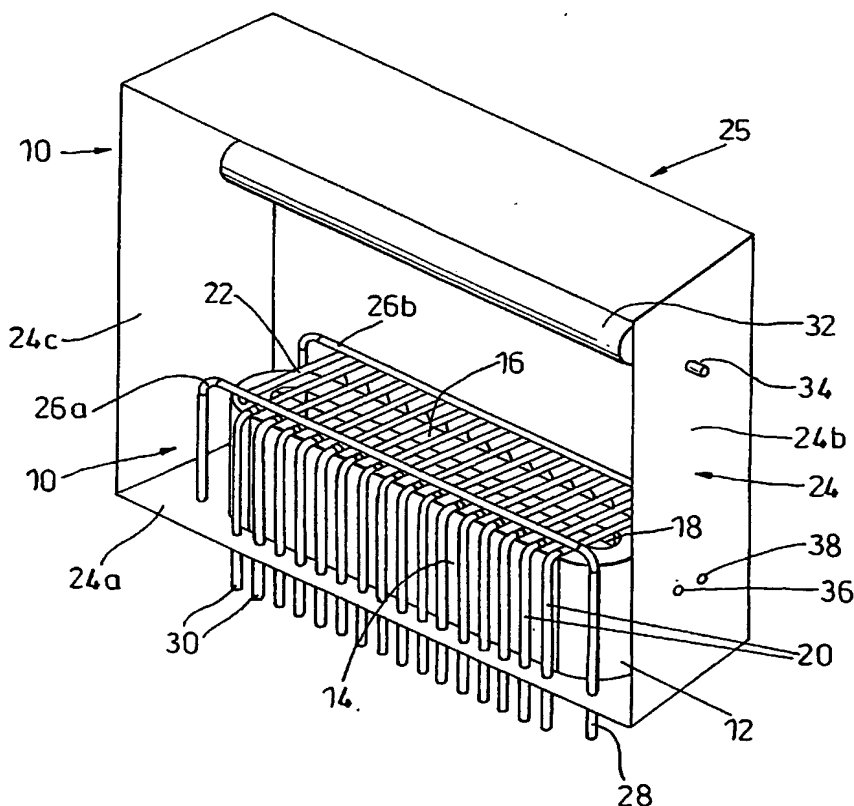

(57) Abstract: An X-ray scanning apparatus comprises a number of multi-focus X-ray tubes (25) spaced around an axis X and arranged to emit X-rays through an object on the axis which are detected by sensors (52). Each tube (25) can emit X-rays from a plurality of source positions. In each scanning cycle, in which each of the source positions in each of the tubes is used once, the ordering of the positions used is arranged so as to minimize the thermal load on the tubes (25). This is achieved by ensuring that each source position is non-adjacent to the previously active one and the next active one.

WO 2004/097386 A1



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## CONTROL MEANS FOR HEAT LOAD IN X-RAY SCANNING APPARATUS

The present invention relates to X-ray scanning in which X-rays are directed through an object from a number of positions around the object and the X-rays transmitted through the object are detected and used to build up an image of the object. This type of scanning is referred to as computed tomography (CT) scanning.

One method of CT scanning involves rotating an X-ray source around the object so that it directs X-rays through the object in different directions. Another method, for example as disclosed in US4274005, involves positioning a number of X-ray sources around the object and then operating the sources in turn so that the active source position scans round the object.

As the use of X-ray scanners, for example in security applications, increases, there is an increasing demand for scanners which operate quickly and which have a long lifetime.

Accordingly the present invention provides an X-ray imaging apparatus comprising X-ray production means arranged to produce X-rays from a plurality of source positions spaced around an object location and spaced from each other by a source spacing, a plurality of X-ray sensors arranged to be spaced around the object position so as to detect X-rays emitted from the source positions and passing through the object position, and control means arranged to control the order in which the source positions are active such that the average smallest displacement between an active source position in one emission period and an active source position in the subsequent period is greater than the source spacing.

This increase in average spacing between successively active source positions helps to spread the thermal load in the X-ray source.

5 Preferably said average smallest displacement is at least twice the source spacing. This can most easily be achieved by ensuring that the control means is arranged such that no active source position in any one emission period is adjacent a source position active in the next emission period.

10 The control means may arranged so that in each emission period only one source position is active.

15 Alternatively the control means may arrange such that in each emission period a plurality of source positions are active simultaneously. This can reduce the scanning time and increase the scanning rate.

20 Where the source positions are each arranged to produce X-rays which will be detected by a corresponding group of sensors, the control means is preferably arranged such that in each emission period, there is no overlap between the groups of sensors for said plurality of source positions. This ensures that the detected X-rays from each of the simultaneously active sources can be distinguished.

25 Preferably in each emission period at least half of the sensors are arranged to receive X-rays from the active source positions. More preferably in each emission period substantially all of the sensors are arranged to receive X-rays from the active source positions.

30 Preferably the apparatus comprises a plurality of X-ray tubes each providing a plurality of said source positions.

In this case the control means is preferably arranged such that in each emission period the active source position is in a different tube from the active source position in the previous emission period.

- 5 Conveniently only one source position is active in each emission period and the active source positions are provided in each of the tubes in turn.

Preferably, within each tube, the order in which the source positions are active is arranged such that in each emission period the active source  
10 position is non-adjacent to the source position active in the previous emission period.

Preferred embodiments of the present invention will now be described by way of example only with reference to the accompanying drawings in  
15 which:

Figure 1 shows an X-ray emitter suitable for use with the invention,

20 Figure 2 is a diagram of an X-ray imaging system according to the invention including a number of emitter units as shown in Figure 1;

Figure 3 is a diagram of the layout of an X-ray imaging system according to a second embodiment of the invention; and  
25

Figure 4 is a diagram of the layout of an X-ray imaging system according to a third embodiment of the invention.

Referring to Figure 1, a multi-focus X-ray tube 10 comprises a ceramic  
30 former 12 and an emitter element 18 extending along between the sides 14, 16 of the former. A number of grid elements in the form of grid wires

20 are supported on the former 12 and extend over the gap between its two sides 14, 16 perpendicular to the emitter element 18, but in a plane which is parallel to it. A number of focusing elements in the form of focusing wires 22 are supported in another plane on the opposite side of the grid wires to the emitter element. The focusing wires 22 are parallel to the grid wires 20 and spaced apart from each other with the same spacing as the grid wires, each focusing wire 22 being aligned with a respective one of the grid wires 20.

10 The source 10 is enclosed in a housing 24 of an emitter unit 25 with the former 12 being supported on the base 24a of the housing. The focusing wires 22 are supported on two support rails 26a, 26b which extend parallel to the emitter element 18, and are spaced from the former 12, the support rails being mounted on the base 24a of the housing. The support rails 26a, 26b are electrically conducting so that all of the focusing wires 22 are electrically connected together. One of the support rails 26a is connected to a connector 28 which projects through the base 24a of the housing to provide an electrical connection for the focusing wires 22. Each of the grid wires 20 extends down one side 16 of the former and is connected to a respective electrical connector 30 which provide separate electrical connections for each of the grid wires 20.

An anode 32 is supported between the side walls 24b, 24c of the housing. The anode extends parallel to the emitter element 18. The grid and focusing wires 20, 22 therefore extend between the emitter element 18 and the anode 32. An electrical connector 34 to the anode extends through the side wall 24b of the housing.

The emitter element 18 is supported in the ends of the former and is heated by means of an electric current supplied to it via further connectors 36, 38 in the housing.

In order to produce a beam of electrons from one position, a pair of adjacent grid wires 20 can be connected to an extracting potential which is positive with respect to the element 18 while the remaining grid wires are connected to a blocking potential which is negative with respect to the element 18. By selecting which pair of wires 20 is used to extract electrons, the position of the beam of electrons can be chosen. As the X-rays will be emitted from the anode 32 at a point where the electrons strike it, the position of the X-ray source can also be chosen by choosing the extracting pair of grid wires. The focusing elements 22 are all kept at a positive potential with respect to the grid wires 20 so that electrons extracted between any pair of the grid wires will also pass between, and be focussed by, a corresponding pair of focusing elements 22.

Referring to Figure 2, an X-ray scanner 50 is set up in a conventional geometry and comprises an array of emitter units 25 arranged in an arc around a central scanner axis X, and orientated so as to emit X-rays towards the scanner axis X. A ring of sensors 52 is placed inside the emitters, directed inwards towards the scanner axis. The sensors 52 and emitter units 25 are offset from each other along the axis X so that X-rays emitted from the emitter units pass by the sensors nearest to them, through the object, and are detected by a number of sensors furthest from them. The number of sensors 52 that will detect X-rays from each source depends on the width of the fan of X-rays that is emitted from each source position in the tubes 25. The scanner is controlled by a control system which operates a number of functions represented by functional blocks in Figure 5. A system control block 54 controls, and receives data from, an image display unit 56, an X-ray tube control block 58 and an image reconstruction block 60. The X-ray tube control block 58 controls a focus control block 62 which controls the potentials of the focus wires 22 in each of the emitter units 25, a grid control block 64 which controls

the potential of the individual grid wires 20 in each emitter unit 25, and a high voltage supply 68 which provides the power to the anode 32 of each of the emitter blocks and the power to the emitter elements 18. The image reconstruction block 60 controls and receives data from a sensor control  
5 block 70 which in turn controls and receives data from the sensors 52.

In operation, an object to be scanned is passed along the axis X, and X-ray beams are directed through the object from the X-ray tubes 25. In each scanning cycle each source position in each tube 25 is used once, the  
10 scanning cycle being repeated as the object moves along the axis X. Each source position produces a fan of X-rays which after passing through the object are detected by a number of the sensors 52. However, the order in which the tubes and the positions within the tubes are used is controlled as will now be described.

15 The order of X-ray emission from the source positions in the tubes 25 is chosen so as to minimize the thermal load on the X-ray tube. This is achieved by ordering the emissions so that each source position is non-adjacent to, and therefore spaced from, the previous one and the  
20 subsequent one. This ordering applies both to the source positions within each tube 25, and also to the tubes themselves. Therefore each source position is in a different tube to the previous one and the next one. In fact the best distribution of thermal load is achieved if the source position cycles through all of the tubes, using one position from each tube, and  
25 then cycles through the tubes again using a different source position within each tube. The cycling is then repeated until all of the source positions in all of the tubes have been used once. This completes one scanning cycle which can then be repeated.

30 Within each tube the source positions are taken in an order which spreads the thermal load within the tube. This is achieved by ordering the source



positions so that the distance between each source position and the next one in that tube, and the previous one in that tube, are both maximized. Firstly, therefore, if the number of source positions per tube allows it, each source position in the tube should be non-adjacent to the next and  
 5 previous ones in that tube. Then, depending on the number of source positions, the ordering is chosen so as to distribute the thermal load as much as possible.

For example, if as in a second embodiment of the invention shown in  
 10 Figure 3, there are five X-ray tubes 60, 61, 62, 63, 64 numbered in the order in which they are positioned 1, 2, 3, 4 and 5, and each one can produce X-rays from 5 source positions 70, 71, 72, 73, also numbered in order along the tube 60 as 1, 2, 3, 4 and 5, then best ordering for the source positions within each tube is 1, 3, 5, 2, 4. The same sequence is  
 15 also used for ordering the tubes so as to maximize the angular separation between successive emissions. This produces an emission ordering as follows, where the source positions are numbered in order round the object 75 starting at the left hand end of the tube 60 at the left end of the row and counting to the right hand end of the tube 64 at the right end of  
 20 the row.

Tube	Source Position in Tube	Overall Source position
1	1	1
3	1	11
5	1	21
2	1	6
4	1	16
1	3	3
3	3	13
5	3	23
2	3	8
4	3	18
1	5	5

3	5	15
5	5	25
2	5	10
4	5	20
1	2	2
3	2	12
5	2	22
2	2	7
4	2	17
1	4	4
3	4	14
5	4	24
2	4	9
4	4	19

The same ordering could also be used with, for example, 25 source positions in a single tube which is shaped around the object 75.

- 5 It will be appreciated that, for X-ray tubes with less than 5 source positions it is not possible to avoid using adjacent positions in subsequent emissions. However, for tubes with 5 or more source positions, this can be avoided.
- 10 Referring to Figure 4, in a third embodiment of the invention a plurality of X-ray sources 80 are spaced around an axis X, with a plurality of sensors 82 axially offset from the sources 80 as in the first embodiment. When one of the sources 80a emits an X-ray beam 84 this diverges, passes through the object 86 and reaches a number of the sensors 82. The
- 15 number of sensors 82 which will detect X-rays from each of the sources depends on the width of the beam of X-rays, which is a known quantity for any give system, and can be quantified in terms of a half-angle. This is the angle between the centre of the beam and the edge of the beam.

When the sensors 82 which are needed to detect X-rays from each of the source positions 80 are known, source positions can be selected which can emit simultaneously, provided that they do not require any common detectors. For example if there are 24 source positions 80 and 24 sensors 82 and each source position requires 5 sensors, then four of the sensors 80a, 80b, 80c, 80d, spaced around the object at 90° intervals can be used simultaneously.

In practice the number of source positions and sensors is likely to be higher than this. To satisfy the Nyquist sampling theorem, it is necessary to match the number of source positions  $N_\phi$  to the number of sensors  $N_s$  of width  $d$  that are required to cover the linear dimension of the object  $N_s d$ . This leads to the result

$$N_\phi = \pi N_s / 2.$$

For example an image where  $N_s = 64$  will require  $N_\phi = 100$  sampling points to satisfy the Nyquist sampling criterion.

It will be appreciated that the ordering of the emission positions can be varied in a large number of ways for any given number of emission positions, and that the optimum ordering will also vary depending on the number of emission positions and the number of X-ray tubes.


## CLAIMS

1. An X-ray imaging apparatus comprising X-ray production means arranged to produce X-rays from a plurality of source positions spaced around an object location and spaced from each other by a source spacing, a plurality of X-ray sensors arranged to be spaced around the object position so as to detect X-rays emitted from the source positions and passing through the object position, and control means arranged to control the order in which the source positions are active such that the average smallest displacement between an active source position in one emission period and an active source position in the subsequent period is greater than the source spacing.
2. Apparatus according to claim 1 wherein said average smallest displacement is at least twice the source spacing.
3. Apparatus according to claim 1 or claim 2 wherein the control means is arranged such that no active source position in any one emission period is adjacent a source position active in the next emission period.
4. Apparatus according to any foregoing claim wherein the control means is arranged so that in each emission period only one source position is active.
5. Apparatus according to any of claims 1 to 3 wherein the control means is arranged such that in each emission period a plurality of source positions are active simultaneously.


6. Apparatus according to claim 5 wherein each of the source positions is arranged to produce X-rays which will be detected by a corresponding group of sensors, and the control means is arranged such that in each emission period, there is no overlap between the groups of sensors for said plurality of source positions.
7. Apparatus according to claim 5 or claim 6 wherein in each emission period at least half of the sensors are arranged to receive X-rays from the active source positions.
8. Apparatus according to claim 7 wherein in each emission period substantially all of the sensors are arranged to receive X-rays from the active source positions.
9. Apparatus according to any foregoing claim comprising a plurality of X-ray tubes each providing a plurality of said source positions.
10. Apparatus according to claim 9 wherein the control means is arranged such that in each emission period the active source position is in a different tube from the active source position in the previous emission period.
11. Apparatus according to claim 10 wherein only one source position is active in each emission period and the active source positions are provided in each of the tubes in turn.
12. Apparatus according to any of claims 9 to 11 wherein, within each tube, the order in which the source positions are active is arranged such that in each emission period the active source position is non-adjacent to the source position active in the previous emission period.

13. An X-ray imaging apparatus substantially as hereinbefore described with reference to Figures 1 and 2, Figure 3 or Figure 4 of the accompanying drawings

1/3

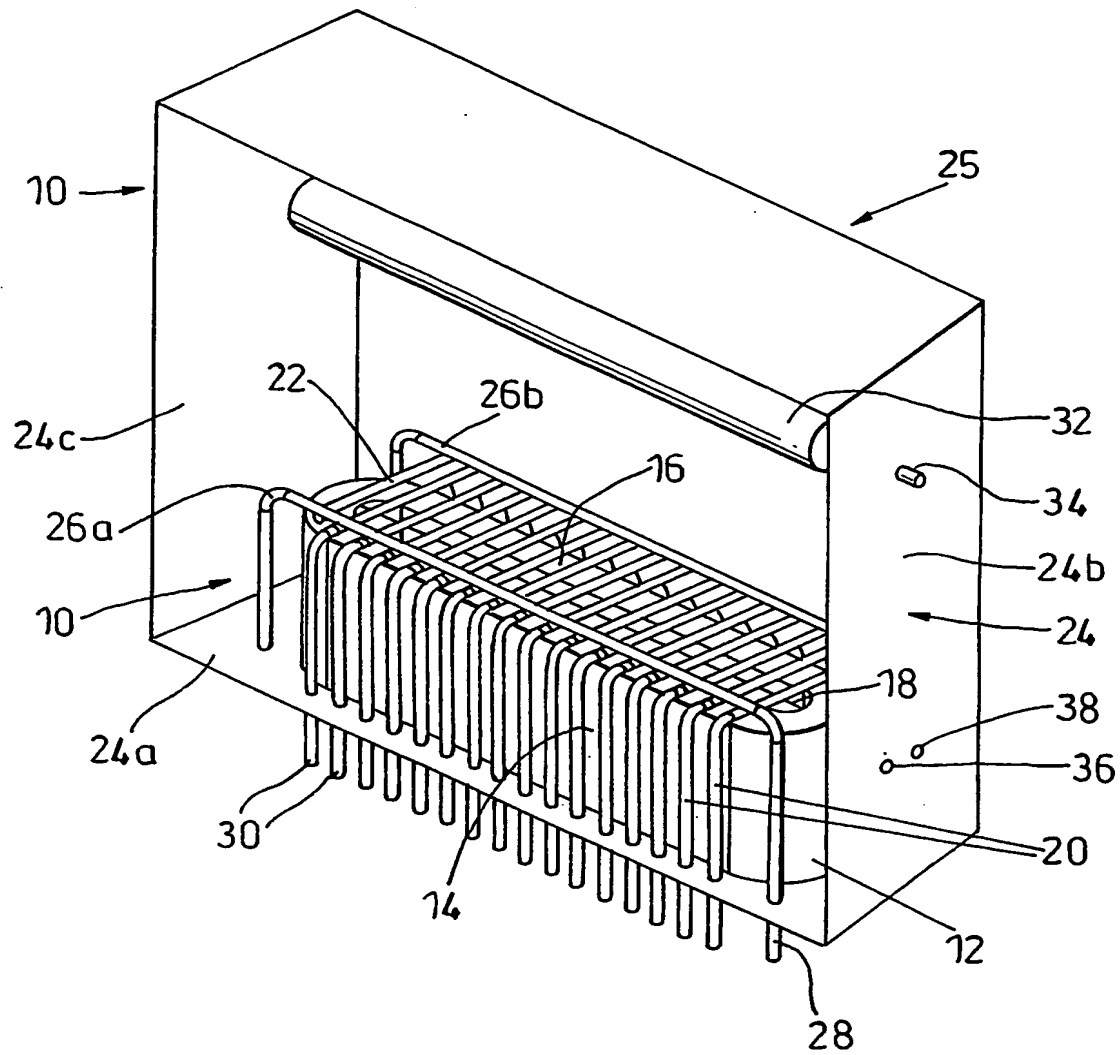
**Fig. 1**

2/3

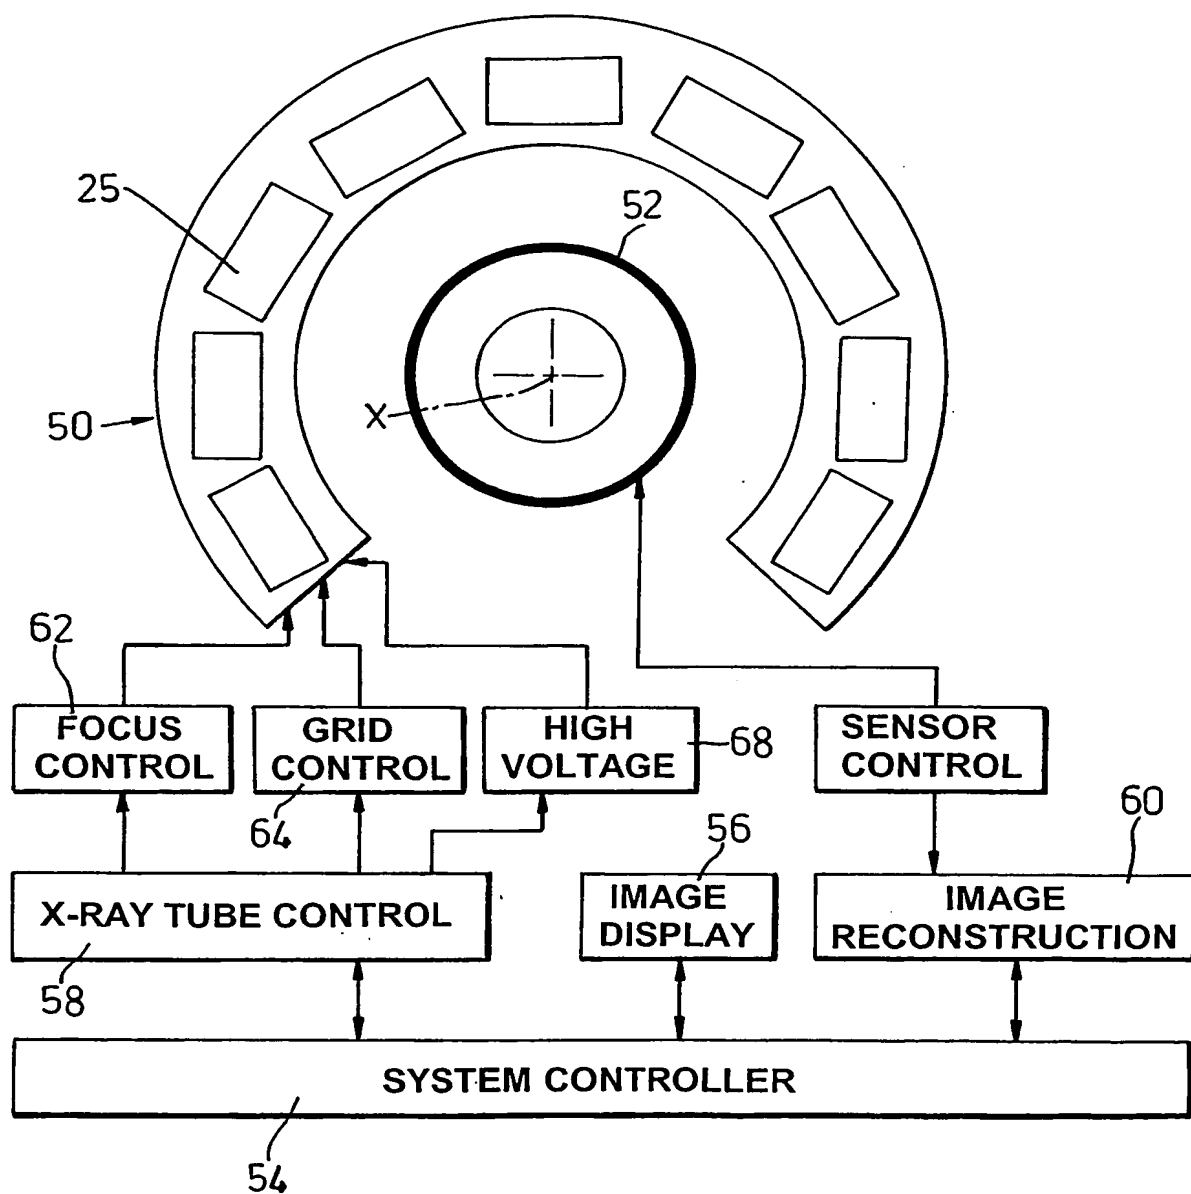
*Fig. 2*



3/3

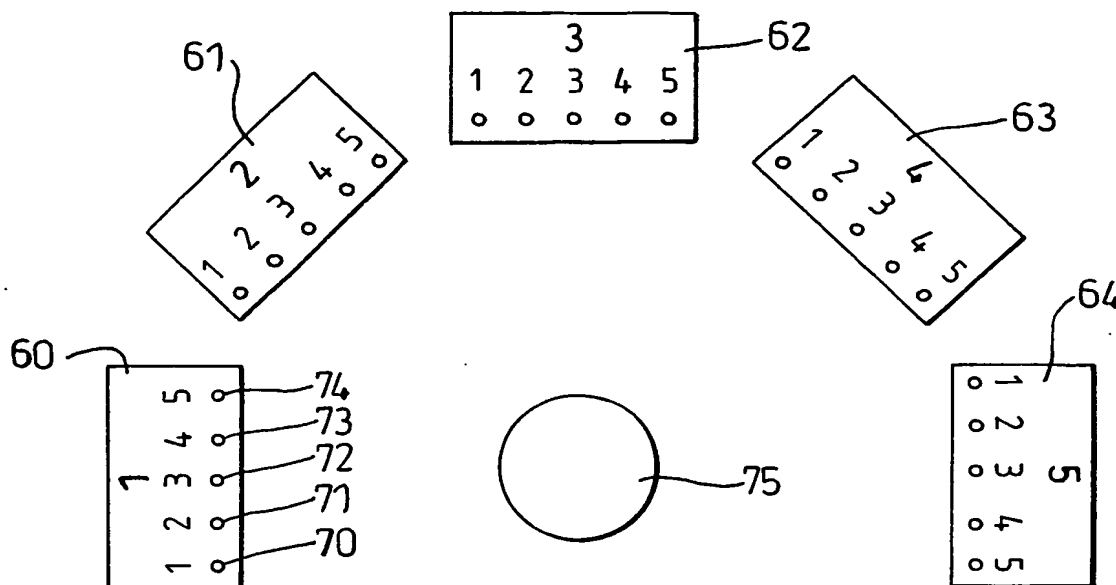

**Fig. 3**

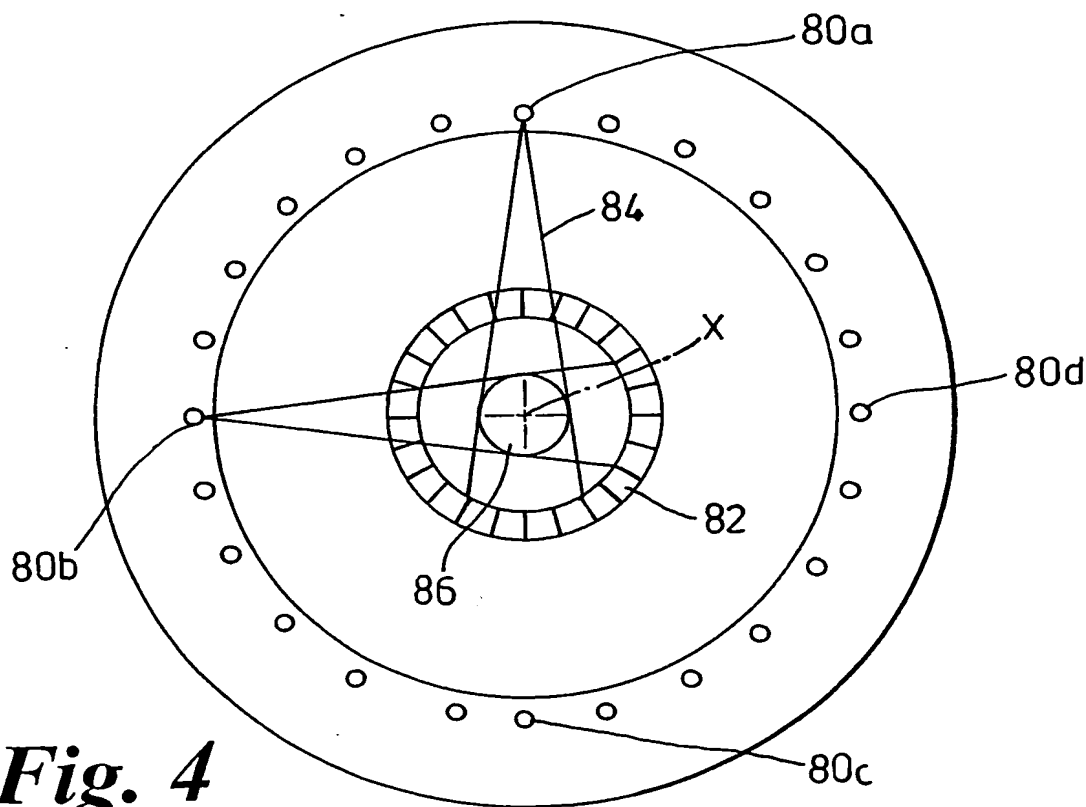

**Fig. 4**

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No  
PCT/GB2004/001729

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 601N23/04 H05G1/60 A61B6/03

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 601N H01J A61B H05G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 057 725 A (WAGNER WOLFGANG) 8 November 1977 (1977-11-08) column 1, line 55 - column 2, line 8	1-8, 13
Y	column 4, line 3 - line 31; figures 1, 2	9
X	FR 2 328 280 A (EMI LTD) 13 May 1977 (1977-05-13) page 5, line 3 - line 9 page 17, line 17 - page 18, line 32; figures 1, 11	1, 13
Y	US 4 274 005 A (YAMAMURA TOSHIO ET AL) 16 June 1981 (1981-06-16) cited in the application column 1, line 63 - column 2, line 11 column 2, line 61 - column 3, line 20 column 3, line 48 - line 61; figures 1, 18, 19	9
A		1-8
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

4 August 2004

Date of mailing of the international search report

12/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Wulveryck, J-M

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No  
PCT/GB2004/001729

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 467 377 A (DAWSON RALPH L) 14 November 1995 (1995-11-14) the whole document</p> <p>-----</p>	1-9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Patent Application No  
PCT/GB2004/001729

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4057725	A	08-11-1977	DE 2442809 A1	18-03-1976
			CA 1139895 A1	18-01-1983
			DE 2463014 C2	06-09-1984
			FR 2284113 A1	02-04-1976
			GB 1527728 A	11-10-1978
			JP 51055286 A	14-05-1976
			US RE32961 E	20-06-1989
FR 2328280	A	13-05-1977	DE 2647220 A1	28-04-1977
			FR 2328280 A1	13-05-1977
			JP 52050186 A	21-04-1977
			NL 7611391 A	20-04-1977
			SE 7614058 A	30-07-1977
US 4274005	A	16-06-1981	JP 1483979 C	27-02-1989
			JP 55046408 A	01-04-1980
			JP 63031894 B	27-06-1988
			DE 2933831 A1	03-04-1980
			GB 2034149 A , B	29-05-1980
US 5467377	A	14-11-1995	NONE	